




X-2 CROSSMEMBER FOR POWER RACK

X2STBLGST

Owner's Manual



X2STBLGST

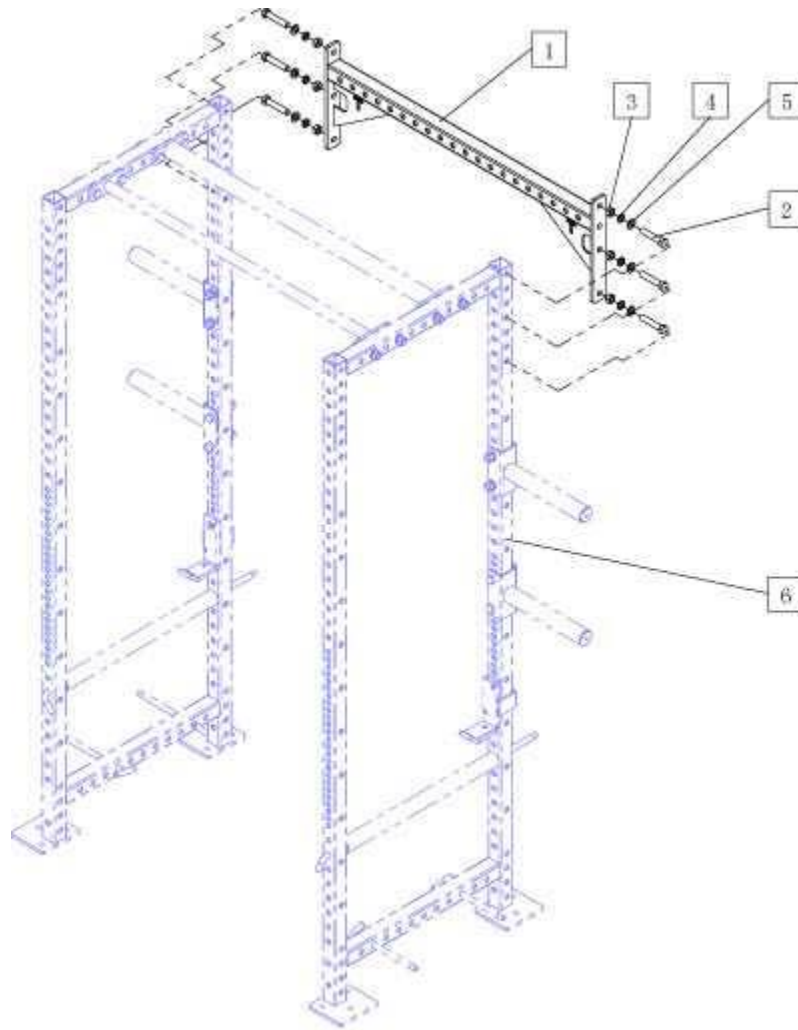

PARTS & HARDWARE LIST		
KEY #	DESCRIPTION	QTY
(1)	STABILIZER BAR GUSSETED	x1
(2)	M16x80 HEX BOLT	x6
(3)	M16 HEX NUT	x6
(4)	16 FLAT WASHER	x6
(5)	16 SPRING WASHER	x6
(6)	X-2 RACK (NOT SUPPLIED)	x1

ASSEMBLY INSTRUCTIONS

1. Line up the holes of the **STABILIZER BAR GUSSETED (1)** with the holes of the **X-2 RACK (6)** in the desired location.
2. Insert each **M16x80 HEX BOLT (2)** into a **16 FLAT WASHER (4)**, and then insert the **M16x80 HEX BOLTS (2)** through the aligned holes of the **STABILIZER BAR GUSSETED (1)** and **X-2 RACK (6)**.
3. Place a **16 SPRING WASHER (5)** on the other end of each **M16x80 HEX BOLT (2)**, and then secure each of them with an **M16 HEX NUT (3)**.
4. Once assembled, make sure all nut and bolt combinations are properly tightened before use.

NEED HELP?

CONTACT US FIRST.

1 (800) 605-8241

info@titandistributorsinc.com / www.titan.fitness

Business Hours: Monday–Friday • 8:00 a.m.–5:00 p.m. (CT)