



WWW.PALLETFORKS.COM
TITAN
ATTACHMENTS




OWNER'S MANUAL

MPN(s): 3X6OHSTG, 3X8OHSTG, 4X4OHSTG, 4X6OHSTG, 4X8OHSTG

SKU(s): 840067, 840068, 840069, 840070, 840057

PARTS DIAGRAM

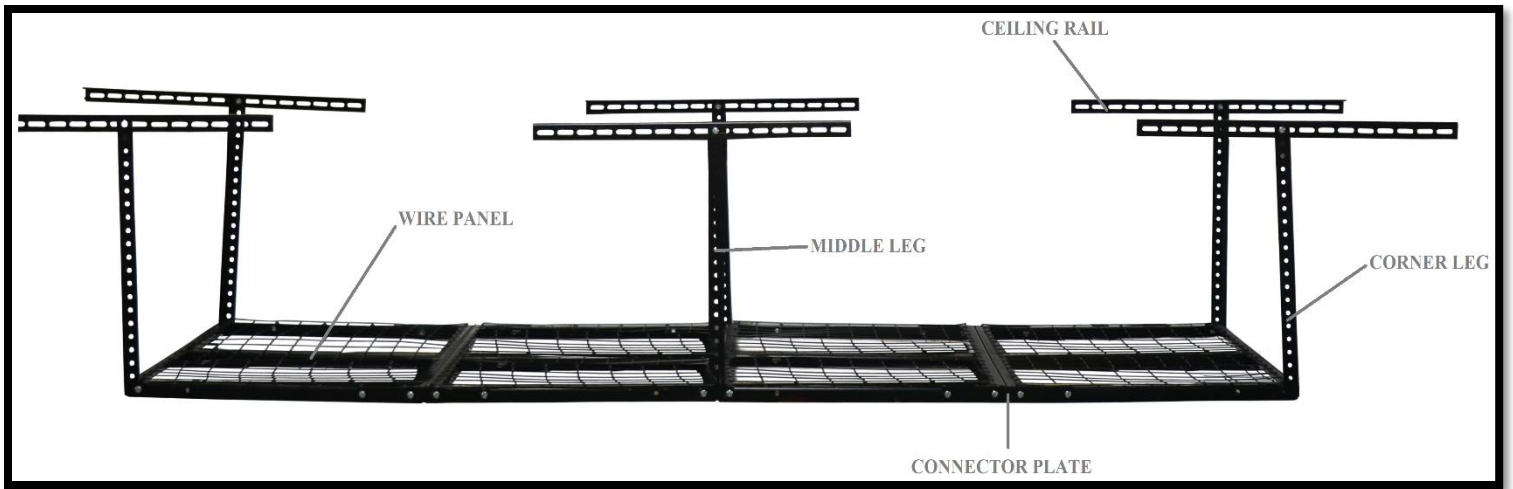

DESCRIPTION	QUANTITY				
	<u>3X6OHSTG</u>	<u>3X8OHSTG</u>	<u>4X4OHSTG</u>	<u>4X6OHSTG</u>	<u>4X8OHSTG</u>
WIRE PANEL	x3	x4	x4	x3	x4
CONNECTOR PLATE	x4	x4	x4	x4	x4
MIDDLE LEG	N/A	x2	x2	N/A	x2
CORNER LEG	x4	x4	x4	x4	x4
CEILING RAIL	x4	x6	x6	x4	x6
CEILING BOLT M8-1.25x70MM	x8	x8	x8	x8	x12
REGULAR BOLT M8-1.25x19MM	x33	x38	x21	x28	x36
WASHER M8	x41	x46	x29	x36	x48
NUT M8	x41	x46	x29	x36	x48

ASSEMBLY INSTRUCTIONS

Step 1: Align the sections, with the wire panels facing downward for easy assembly, to match the dimensions of the storage rack. In this case 4'x6'

Step 2: Locate the connector plate with 4 holes. Attach the connector plate where the two separate sections meet using the bolts provided. Bolt Orientation: bolt, connector, wire panel, lock washer, nut. See attached photo





Note: This hole will not receive a bolt, lock washer, and nut combo. If the customer decides not to use the extensions, on the corner legs when hanging the rack, they can add a bolt to this location.



Step 3: Locate corner legs. Attach corner leg with one bolt, lock washer, and nut. **NOTE: If the mesh wire is still facing downward, the corner legs should also face downward.**






Step 4: (Optional) Once the corner uprights are connected, there is an option to add an extension, that is included, to each corner upright with the use of one bolt, lock washer, and nut per extension. We recommend putting the bolt in the middle hole from the overlap of the upright and extension. Example: If the corner leg and extension overlap 5 holes, put the bolt through the third hole for more stability.



Step 5: Locate the ceiling rail to the end of the extension with the flat side facing upward. This hardware assembly will include one bolt, flat washer, lock washer, and nut. Note: If the wire panel is still in the downward position, the flat side of the ceiling rail should face downward as well. When installing the hardware make sure that the flat washer is on the ceiling rail, as these holes are slotted for easy adjustment.



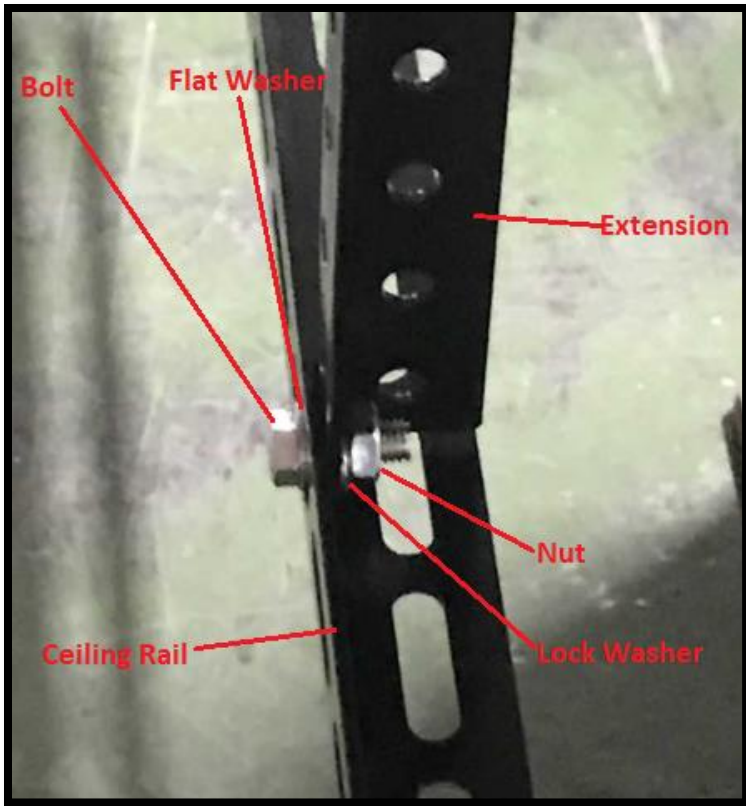

Step 6: Tighten all bolt combinations and they product is ready for hanging.





*This concludes the OHSTG Owner's
Manual.*

Enjoy!

DISCLAIMER

This equipment must be used with care by capable and competent individuals under supervision, if necessary.

The use of any equipment, including this one, involves the potential risk of injury. You accept and assume full responsibility for any and all injuries, damages (both economic and non-economic), and losses of any type, which may occur, and you fully and forever release and discharge Titan, its insurers, employees, officers, directors, associates, and agents from any and all claims, demands, damages, rights of action, or causes of action, present or future, whether the same be known or unknown, anticipated, or unanticipated, resulting from or arising out of the use of said equipment.

TITAN MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE EQUIPMENT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE. BUYER ASSUMES ALL LIABILITY IN USE OF THE EQUIPMENT.

NEED HELP?

CONTACT US FIRST.

1 (800) 605-8241

info@titandistributorsinc.com / www.palletforks.com

Business Hours: Monday–Friday • 8:00 a.m.–5:00 p.m. (CT)

